

Magic Mat – Commercial


Magic Mats are our premium line of entrance mats, enhancing the safety and protection of most office and commercial floors. The specially blended cotton/high absorbent fiber yarn can hold many times its own weight in moisture and still function effectively.

Features:

- Magic Mats prevent moisture, dirt and grease from being transferred onto your floors, by effectively absorbing and trapping these substances in the mat.
- The mat's low pile height easily fits under most doors and supports quicker drying times.
- NFSI certified "high traction" backing helps reduce the possibility of injuries due to slips and falls.
- Regular vacuuming and periodic cleaning with a light to medium use carpet extractor will ensure your mat's optimal performance and retain the warranty coverage.

Applications:

- Best suited for placement in transition areas such as entrances and hallways into: public buildings, shopping malls, schools, hospitals, entertainment venues, manufacturing plants, commercial kitchens, washrooms, etc.

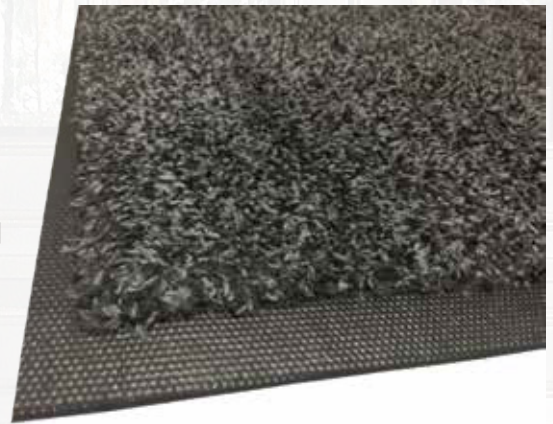

Product Specs - Magic Mat*

- Magic Mat Yarn type: Cotton/high absorbent fiber blend
 - Pile construction: Tufted cut pile
 - Pile height: Approx. 8 mm
 - Pile weight: Approx. 800 g/m² (weight before dye)
 - Dyeing process: Reaction dyed
 - Backing: NBR rubber backing (grease proof)
 - Total thickness: Approx. 9 mm
 - Total weight: Approx. 2.5 kg/m²
 - Traction: NFSI "High Traction" certified
 - Fire resistance classification: BS4790, CPSC FF 1-70, CAN/CGSB-4.2 No. 27.6-M91



Charcoal

FIND US ON:     

 0724 583 333/ 0773 258 855/ 020 8013 333

 info@soilex.co.ke

 www.soilex.co.ke

P.O. BOX. 78175, NAIROBI, KENYA.

 Ectoville Industrial Estate, Industrial Area,
Off Enterprise Road, Off Road A, Off Kibo Street,
Yakuti Close, Nairobi.

RECOMMENDED MAINTENANCE/CARE INSTRUCTIONS:

- Regular thorough cleaning using an upright vacuum cleaner is a must.
- Periodic cleaning by injection/extraction methods using a light to medium grade carpet extractor with soft brush power head.
- Water temperature should not exceed 40°C/104°F.
- Do not use floor scrubbers, floor burnishers, steamers, pressure/power washers.

AVAILABLE SIZES:

- Standard sizes (see chart)
- Custom sizes available up to 1.8 m wide

| STANDARD SIZES | | |
|----------------|-----------|---------|
| INCHES | cm | APPROX. |
| 33 x 59 | 85 x 150 | 3 x 5' |
| 33 x 118 | 85 x 300 | 3 x 10' |
| 45 x 71 | 115 x 180 | 4 x 6' |
| 45 x 94 | 115 x 240 | 4 x 8' |
| 45 x 118 | 115 x 300 | 4 x 10' |



LIMITED WARRANTY

- Magic Mats come with our manufacturer's 2 year limited warranty against defective materials and workmanship.

FIND US ON: [f](#) [t](#) [w](#) [in](#) JUMIA

0724 583 333/ 0773 258 855/ 020 8013 333

info@soilex.co.ke

www.soilex.co.ke

Ectoville Industrial Estate, Industrial Area,
Off Enterprise Road, Off Road A, Off Kibo Street,
Yakuti Close, Nairobi.

P.O. BOX. 78175, NAIROBI, KENYA.